


### Steeltree® 25 Series

US Patent No. 3,512,654

The Steeltree® Heavy Duty is for storing large amounts of heavy materials in a compact area. Steeltree® is an excellent option for handling awkward or extremely heavy stock with a forklift. Ideal for bar and tube stocks and sheet material. Units assemble as a single rack or a continuous assembly of any number of racks to handle longer materials.

- 800 lbs. to 3,000 lbs. capacity per arm
- Jarke tapered column design compensates for deflection. (1/8" per foot)
- Double tube bracing
- Sold as units or as component parts
- Single and double sided racks in four column heights
- Straight or inclined arms in lengths from 12" to 60"
- Arms adjust on 3" centers and have removable lips on the ends available
- Assembly is quick & easy no special tools needed

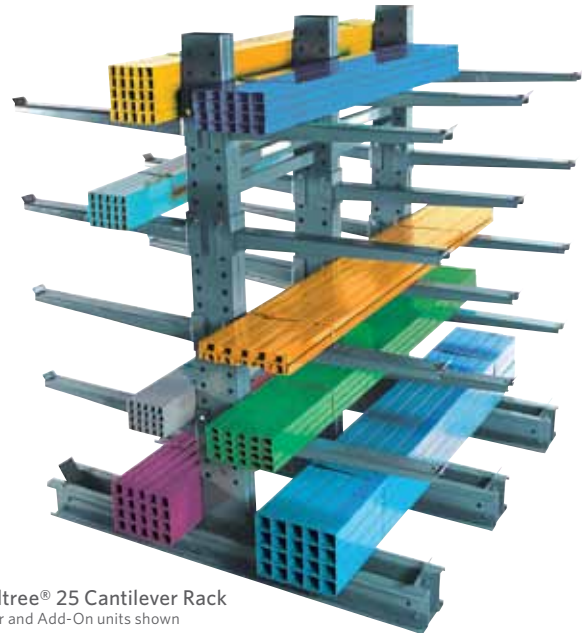

Steeltree® 25 Cantilever Rack  
Starter and Add-On units shown



Arm construction provides efficient load support




Pin and lock construction allows arm to be easily adjusted


### Column Components

Column Height (Ft.)	Arm Length (In.)	Capacity Per Side (Lbs.)	Single Column Model No.	Base Length (In.)	Wt. (Lbs.)	Double Column Model No.	Base Length (In.)	Wt. (Lbs.)
8	12 & 18	18,520 & 14,950	25CS31096	34	183	25CD53096	53	210
8	24	12,530	25CS37096	40	191	25CD65096	65	236
8	30 & 36	10,780 & 9,460	25CS46096	49	211	25CD82096	82	252
8	42 & 48	8,430 & 7,600	25CS58096	61	221	25CD106096	106	292
10	12 & 18	25,650 & 20,640	25CS31120	34	201	25CD53120	53	228
10	24	16,860	25CS37120	40	209	25CD65120	65	254
10	30 & 36	14,250 & 12,340	25CS46120	49	229	25CD82120	82	270
10	42 & 48	10,880 & 9,730	25CS58120	61	239	25CD106120	106	310
10	54 & 60	8,800 & 8,030	25CS70120	73	270	25CD130120	130	330
12	12 & 18	26,300 & 20,450	25CS31144	34	233	25CD53144	53	260
12	24	16,730	25CS37144	40	241	25CD65144	65	286
12	30 & 36	14,160 & 12,270	25CS46144	49	261	25CD82144	82	302
12	42 & 48	10,830 & 9,690	25CS58144	61	271	25CD106144	106	342
12	54 & 60	8,760 & 8,000	25CS70144	73	302	25CD130144	130	362
15	24	16,540	25CS37180	40	371	25CD65180	65	414
15	30 & 36	14,020 & 12,170	25CS46180	49	385	25CD82180	82	438
15	42 & 48	10,750 & 9,620	25CS58180	61	402	25CD106180	106	473
15	54 & 60	8,710 & 7,560	25CS70180	73	419	25CD130180	130	508

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

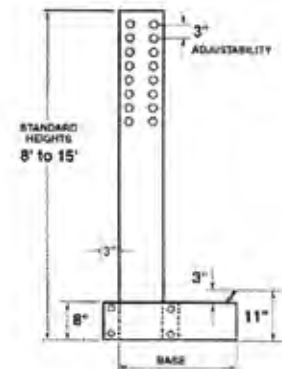

Single Column

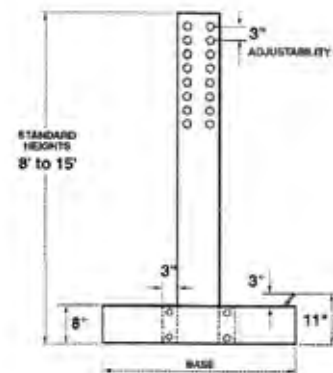

Double Column

### Steeltree® 25 Series (cont.)

#### Steeltree Arm Components — Standard\*

Straight Arm					Inclined Arm				
Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
12	3,300	25ASL12	11	25ASO12	11	25AIL12	12	25AIO12	12
18	2,500	25ASL18	13	25ASO18	13	25AIL18	14	25AIO18	14
24	2,000	25ASL24	15	25ASO24	15	25AIL24	16	25AIO24	16
30	1,600	25ASL30	17	25ASO30	17	—	—	—	—
36	1,300	25ASL36	20	25ASO36	20	—	—	—	—
42	1,145	25ASL42	22	25ASO42	22	—	—	—	—
48	1,000	25ASL48	24	25ASO48	24	—	—	—	—
54	890	25ASL54	26	25ASO54	26	—	—	—	—
60	800	25ASL60	29	25ASO60	29	—	—	—	—

\*Do not exceed column capacities.

#### Steeltree Arm Components — Heavy Duty\*

Straight Arm (8' Column use up to 48" arms max.)					
Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
36	2,175	40ASL36	28	40ASO36	28
42	1,865	40ASL42	31	40ASO42	31
48	1,630	40ASL48	34	40ASO48	34
54	1,480	40ASL54	37	40ASO54	37
60	1,330	40ASL60	40	40ASO60	40

\*Do not exceed column capacities. Capacity is for evenly distributed loads.

#### Steeltree Arm Components — Extra Heavy Duty\*

Straight Arm (10', 12', 15' Columns only)					
Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
36	3,000	60ASL36	43	60ASO36	43
42	2,850	60ASL42	49	60ASO42	49
48	2,500	60ASL48	52	60ASO48	52
54	2,250	60ASL54	57	60ASO54	57
60	2,000	60ASL60	62	60ASO60	62

\*Do not exceed column capacities. Capacity is for evenly distributed loads.

#### Steeltree Series 25 & 60 Brace Sets




Brace Sets for 8' Columns			Brace Sets for 10' & 12' Columns		
Brace Length (Ft.)	Model No.	Wt. (Lbs.)	Brace Length (Ft.)	Model No.	Wt. (Lbs.)
3	25B2036	34	3	25B3036	51
4	25B2048	43	4	25B3048	65
5	25B2060	52	5	25B3060	79
6	25B2072	62	6	25B3072	93
8	25B2096	82	8	25B3096	123

(set of 2)


(set of 3)

#### Arms

##### Straight & Inclined Arm Detail



##### Extra Heavy-Duty Arm Detail\* (uses 2 pins)



#### Steeltree Brace Sets

Brace Sets for 15' Columns		
Model No.	Brace Length (Ft.)	Wt. (Lbs.)
25B4036	3	91
25B4048	4	114
25B4060	5	137
25B4072	6	158
25B4096	8	205

(set of 4 with x-bracing)

#### Deck Support Receptacles

Model No.	Description	Wt. (Lbs.)
25ASO-SR	End Arm	3
25ASO-DR	Center Arm	3.5
25CB-R	Base	2.5

These receptacles are used to cradle 2 x 4's under plywood decking. They are available in both single and double sided designs and will accommodate all 25 series arms and bases.